



Single hole lavatory faucet
EV01XX



Specifications

Descriptions

- 3/8" speedway compression
- Ceramic cartridge
- Push drain
- Drilling hole diameter = 1 1/8 (30mm)

Available flows


- 5.7 L/min, 1.5 gpm (US) 60psi
- 1.9 L/min, 0.5 gpm (US) 60psi (**EV01XX-05**)
- 3.7 L/min, 1 gpm (US) 60psi (**EV01XX-10**)

Cartridge

- 401-121

Certifications

- CSA B125.1
- NSF/ANSI standard 61 and 372
- ASME A112.18.1
- CMR248 Approval
- ADA

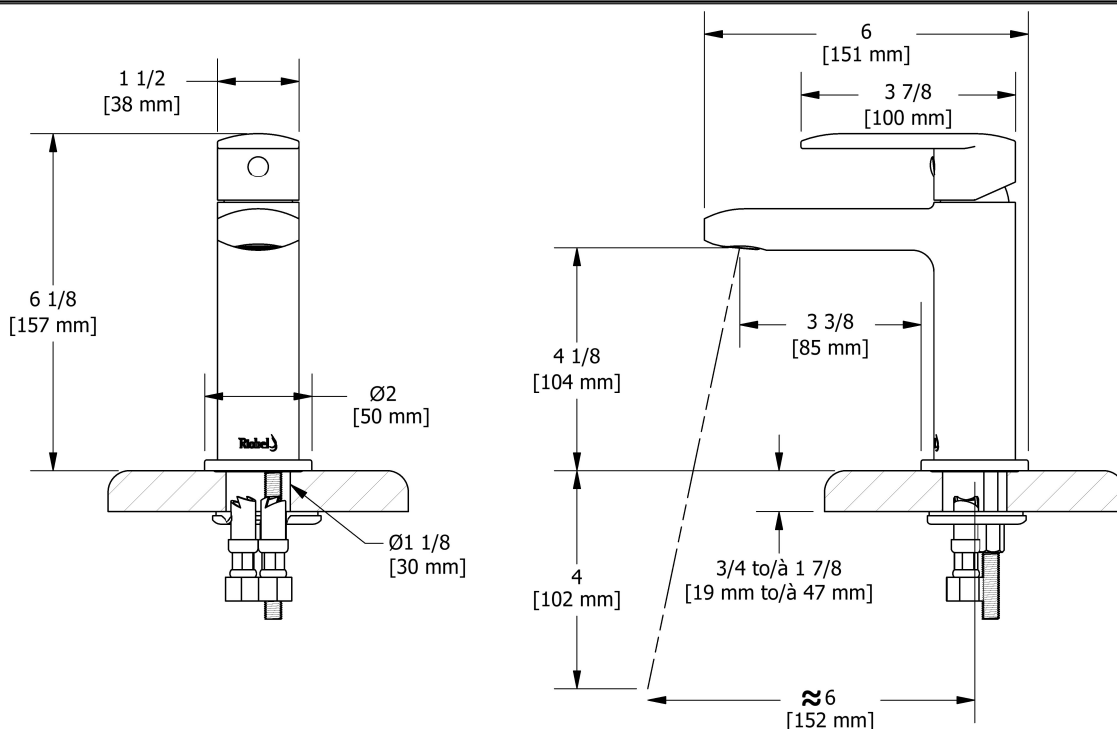

Sizes, models and finishes may differ from those presented.

Warranty

RIOBEL PRO products carry a LIFETIME warranty on their cartridges. All other working parts and finishes are guaranteed against manufacturing defects for a period of five (5) years following the date of purchase.

Customer Service

Ontario, West Canada : 888-287-5354 Quebec, Maritimes, United States : 866-473-8442