




Size - 59 3/8 po x 31 3/8 po x 27 1/4 po
1508 mm x 797 mm x 692 mm



BATHTUB DRAIN ADAPTER

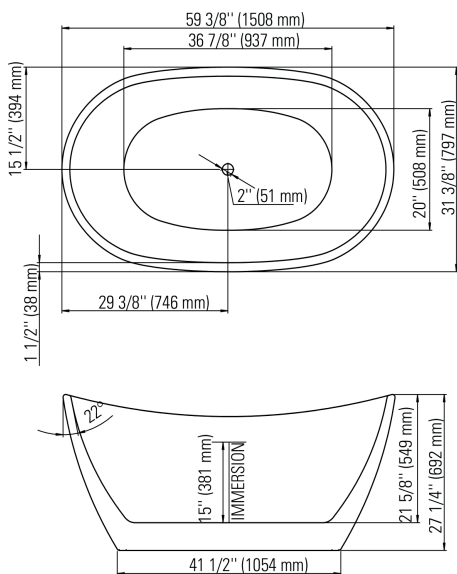

D111 (123 Connect) is a freestanding Tub rough-in (install before tile). Designed to be installed in a 8" to 10" joist space. Can be installed with waterproofing membrane.

NOTES:

BATH MUST BE INSTALLED ON THE FLOOR SUPPORTED BY THE 6 FEET. ADJUST IF NEEDED SO THE BATH IS LEVEL AND ADEQUATELY DRAINS. CONSULT THE FACILITY GUIDELINES FOR FURTHER INFORMATION.

IMPORTANT:

DIMENSIONS OF FIXTURES ARE NOMINAL AND MAY VARY $\pm 1/4$ PO (6MM). THE VARIED WEIGHT ± 5 LB (2.3kg). DRAWING IS NOT TO SCALE. THESE DIMENSIONS MAY BE CHANGED AT THE DISCRETION OF THE MANUFACTURER.

Bathtub only - FLO3260F1
 Mass-Air bathtub - FLO3260F1M
 Rouge-Air bathtub - FLO3260F1A

FEATURES AND PRODUCT BENEFITS

High gloss finish, scratch, stain and fading resistant.
 Freestanding acrylic bathtub with fiber glass reinforced and antimicrobial.

MASS-AIR

Included: 12 injectors, Optima blower 750W (1 1/2h.p.) with 300W heating element and remote control
 Note : The blower is never installed.

ROUGE-AIR

Included: 12 micro-jets, Optima blower 750W (1 1/2h.p.) with 300W heating element and remote control.
 Note : The blower is never installed.

GENERAL OPTIONS

Acrylic colour: white
 Overflow and waste included : chrome
 Bathtub drain adapter (picture below) D-111-ABS or D-111-PVC
 Black neck pillow
 White overflow and drain kit (available January 1, 2017)

MASS-AIR / ROUGE-AIR OPTIONS

Mass-Air Jet inish: white/chrome
 Others: chrome / chrome
 Blower Hose extension 96"
 * A blower hose extension is necessary when the blower is located more than 4' from the bathtub.

PERFECTLY HYGIENIC

Thanks to non-return valves in each injector, no water enters the approved tubing, preventing the formation of bacteria in the system. Twenty minutes after the massage, a drying cycle activates to clean and dry all conduits.

A SAFE SYSTEM

Superior-quality tubing and jets that meet the highest standards and a highly controlled manufacturing process that guarantees complete peace of mind.

CONTROL

Remote control
 Watertight
 Easy start-up



GENERAL SPECIFICATIONS

| | | | |
|--------------------------|-------------------|---------|------------|
| Average weight | Bathtub only | 88 lbs | 40 kg |
| | Mass-Air bathtub | 105 lbs | 48 kg |
| | Rouge-Air bathtub | 115 lbs | 52 kg |
| Water capacity | | 61 gal. | 277 litres |
| Water depth maxi-comfort | | 15" | 381 mm |
| Drain diameter | | 2 " | 51 mm |

ELECTRICAL SPECIFICATIONS

Optima blower 750W with 300W heating element

Certificates of conformity -

Complies with the following specifications or exceeded:

Standard bathtub - CAN / CSA.B45.5 / IAPMO Z124

Standard hydromassage - CAN / CSA.B45.10 / CSA.C22.2 /

UL-1795

