



COSETTE DUAL FLUSH ELONGATED ONE-PIECE TOILET WITH SEAT

VITREOUS CHINA

COSETTE DUAL FLUSH ELONGATED ONE-PIECE TOILET

752CA200


- Vitreous china
- High efficiency, low consumption, Full Flush (1.28gpf /4.8LpF), conserving (0.92gpf/3.5 LpF)
- Meets EPA WaterSense® criteria and MaP PREMIUM
- One-piece design
- Elongated bowl with 2" trapway
- Includes color-matched, slow close, seamless seat
- Includes everything you need, including an easy step-by-step manual for simple do-it-yourself installation
- 5-1/2" x 8-1/8" water surface area
- 2 bolt cap and covers
- Chrome plated actuator
- 1 year warranty



Nominal Dimensions:

693 x 425 x 775mm
(27-9/32" x 16-3/4" x 30-1/2")

Supply by others

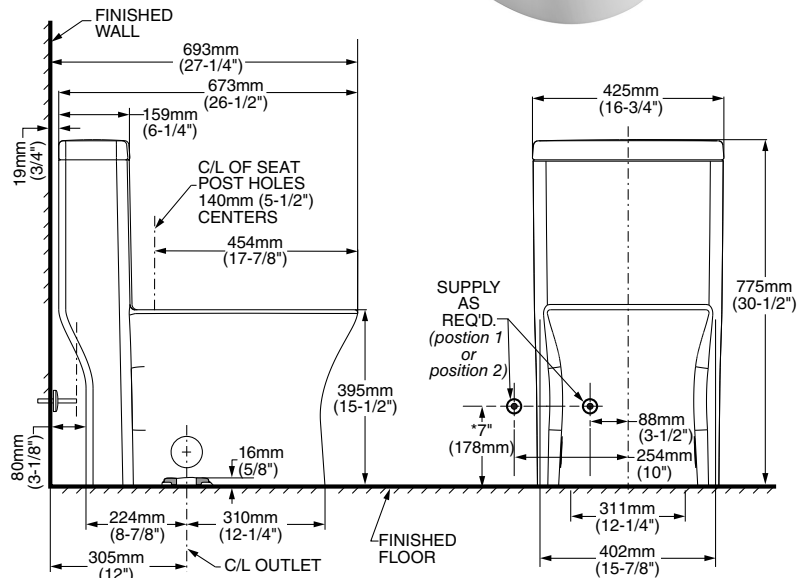

IMPORTANT: Water supply on the wall is required at 3-1/2" (88mm) or 10" (254mm) from centerline of the toilet (see rough-in). First suggested position is hidden behind the toilet. The geometry of the toilet gives space for this installation. The second suggested position is next to the toilet. Between these two positions, the space for the supply between wall and toilet is limited to 3-1/8" (80mm). In this case, check your supply and hose dimensions.

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.2/CSA B45.1-08 for Vitreous China Fixtures
- US EPA WaterSense® Specification for HET's

NOTES:

THIS COMBINATION IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET. * DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED. SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

To Be Specified:

- ☐ Color:
 - ☐ White
- ☐ Supply with stop:

